

# TELESCOPIC BOOM LIFTS



	<b>1200SJP</b>	<b>1350SJP</b>
Platform Height	36.58 m	41.15 m
Horizontal Outreach	22.86 m	24.38 m
Swing (Continuous)	360°	360°
Platform Capacity – Restricted	450 kg	450 kg
Platform Capacity – Unrestricted	230 kg	230 kg
Platform Rotator (Hydraulic)	180°	180°
Jib – Overall Length	2.44 m	2.44 m
Jib - Range of articulation	130° Vertical (+75°/-55°)	130° Vertical (+75°/-55°)
JibPLUS™ - Range of Articulation	180° Horizontal	180° Horizontal
A. Platform Size	0.91 m x 2.44 m	0.91 m x 2.44 m
B. Overall Width (Axles Retracted)	2.49 m	2.49 m
Overall Width (Axles Extended)	3.80 m	3.80 m
C. Tailswing (working condition)	1.67 m	1.67 m
D. Stowed Height	3.05 m	3.05 m
E. Stowed Length	10.64 m	11.86 m
F. Wheelbase	3.81 m	3.81 m
Ground Clearance	0.30 m	0.30 m
Gross Vehicle Weight <sup>1</sup>	18,650 kg	20,300 kg
Maximum Ground Bearing Pressure	7.03 kg/cm <sup>2</sup>	7.38 kg/cm <sup>2</sup>
Drive Speed	5.2 km/h	5.2 km/h
Gradeability	45%	45%
Tyres	445/50D710 Foam Filled	445/50D710 Foam Filled
Axle Oscillation	0.30 m	0.30 m
Turning Radius – Inside (Axles Retracted)	4.39 m	4.39 m
Turning Radius – Inside (Axles Extended)	2.44 m	2.44 m
Turning Radius – Outside (Axles Retracted)	6.86 m	6.86 m
Turning Radius – Outside (Axles Extended)	5.89 m	5.89 m
Diesel Engine - Deutz BF 4M 2011	65 kW	65 kW
Fuel Tank Capacity	117 L	117 L
Hydraulic Reservoir	208 L	208 L
Auxiliary Power	12V DC	12V DC

<sup>1</sup> Certain options or country standards will increase weight.

Specifications may change to meet country standards or with the addition of optional equipment.



# JLG MODEL 1200SJP

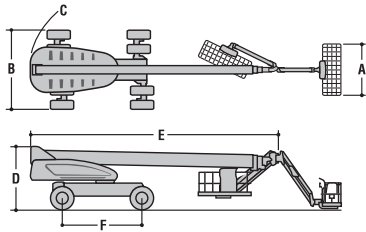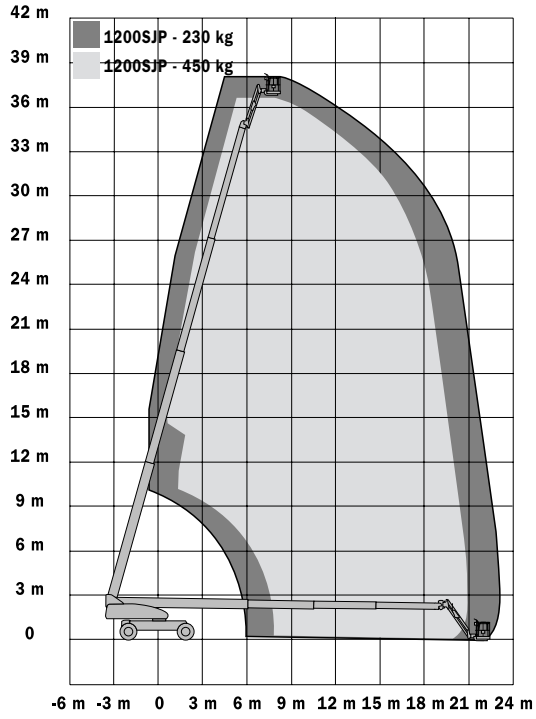

# JLG MODEL 1350SJP

